

CL Attritor
Stirred Vertical Ball Mill
for Limestone Grinding

CLS Attritor
Stirred Vertical Ball Mill
Lime Slaker

**CL & CLS
SPECIALTY ATTRITORS**




The Union Process CLS Attritor

Stirred Vertical Ball Mill Lime Slaker

The patented CLS Attritor Stirred Vertical Ball Mill Lime Slaker operates in continuous processing mode and has been used successfully in power generating plants for flue gas desulphurization (FGD). The Attritor will slake the lime as well as grind the inert grit, eliminating grit separation and disposal problems.

Because of its compact size, the Attritor Stirred Ball Mill Lime Slaker will readily fit under the skirt of the lime silo making it unnecessary to have an additional building to house the mill. This results in substantial savings in space and cost.

As worldwide leaders in fine grinding technology, the Union Process CLS Attritor Stirred Vertical Ball Mill Lime Slaker is the principal component in the Lime Slaking System produced by CHEMCO SYSTEMS L.P. (Monongahela, PA). CHEMCO SYSTEMS is the largest manufacturer of bulk storage and feed systems in the United States (www.chemcosystems.net).

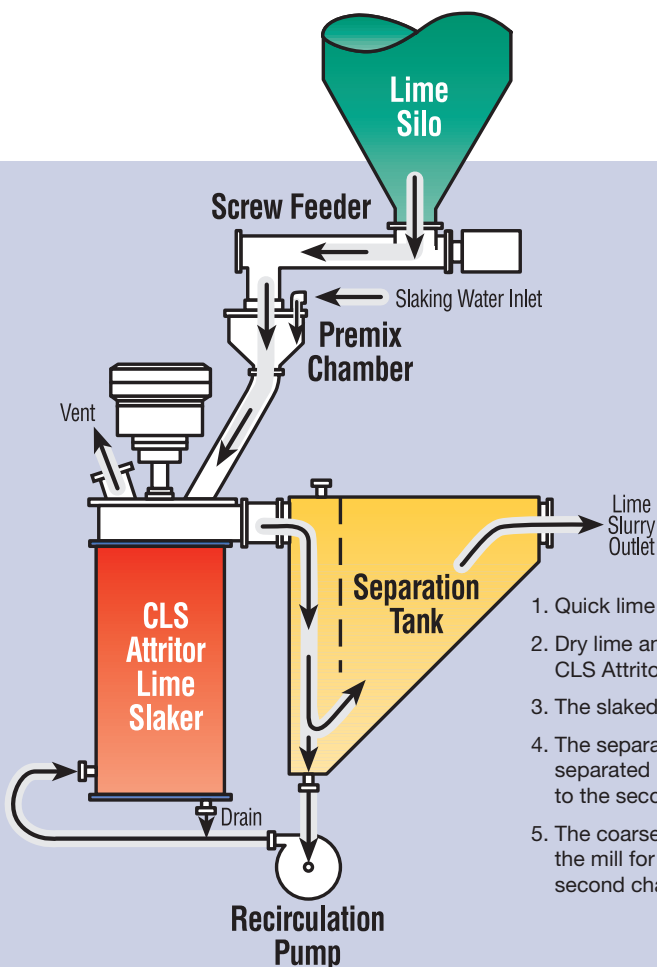

1. Quick lime is withdrawn from the lime silo via a screw feeder.
2. Dry lime and proportional water are mixed in the premix chamber and fed to the CLS Attritor Lime Slaker.
3. The slaked lime and grit discharges from the slaking mill into the separation tank.
4. The separation tank is comprised of two chambers (primary and secondary) that are separated by a wall which allows slurry to flow from the bottom of the first chamber to the second chamber.
5. The coarse grit settles to the bottom of the first chamber and is pumped back to the mill for further grinding. The finer particles of hydrated lime flow upward in the second chamber and exit the separation tank to the lime slurry storage tank.


The Union Process CL Attritor

Stirred Vertical Ball Mill Limestone Grinding System

The economical CL Attritor Stirred Vertical Ball Mill is used for wet grinding limestone for flue gas desulphurization. The process uses limestone feed stock of approximately 6mm in size and wet grinds the limestone to 95% minus 325 mesh. The CL Attritor operates in continuous processing mode. The CL Attritor is the primary component of a grinding circuit which typically includes the separation tank, mill recirculating pump, mill product tank, hydrocyclone, hydrocyclone feed pump and all necessary controls. Due to the CL Attritor's high efficiency, the power consumption for this mill is 50% less compared to conventional ball mills of a similar size. This results in substantially lower operating costs.



1. The process begins with 1-1/2" limestone, which is fed from the silo to the crusher.
2. The limestone is reduced to 6mm pieces in the crusher.
3. The crushed limestone is then mixed with water in the Premix Chamber and fed into the CL Attritor Mill.
4. The limestone slurry exits the CL Attritor Mill and enters the Separation Tank.
5. Any oversized particles are pumped back into the Mill while finer slurry overflows into the Mill Product Tank.
6. The slurry is then fed through a hydrocyclone with the under flow returned to the separation tank.

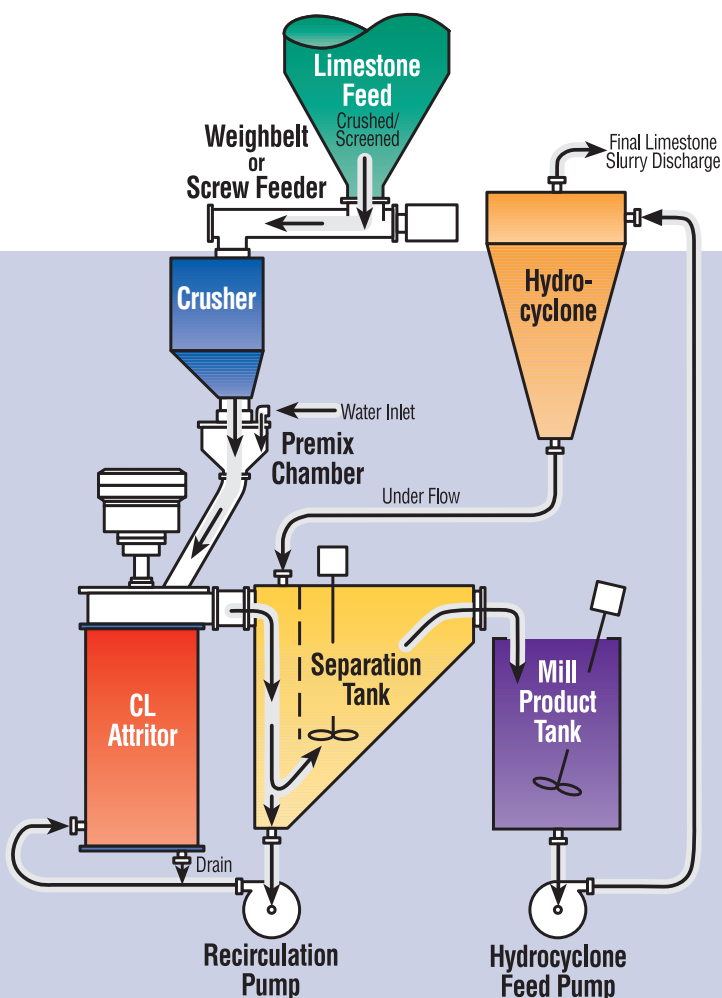

Model CL-5 Laboratory Attritor

The CL-5 Stirred Vertical Ball Mill for Limestone Grinding is a smaller version of the production sized CL Series Mills. It is ideal for research, scale-up and small-scale production. This mill will process in the range of 200-400 pounds of limestone per hour and is equipped with a variable frequency drive (VFD) and a 15 horsepower inverter duty motor. The CL-5 uses 2.5 gallons of grinding media.




SPECIFICATIONS

| CL-5 LABORATORY ATTRITOR | | | | | |
|--------------------------|----|--------------------------------|---------------------------------------|--------------------------------|-----------------------|
| Model | HP | Working Media Volume (gallons) | Maximum thru-put (solids) (lbs./hour) | Dimensions (Inches) *W x D x H | Operating Weight Lbs. |
| CL-5 | 15 | 2.5 | 400 | 34 x 51 x 82 | 1600 |

| CLS ATTRITORS FOR LIME SLAKING | | | | | |
|--------------------------------|-----|--------------------------------|---------------------------------------|--------------------------------|-----------------------|
| Model | HP | Working Media Volume (gallons) | Maximum thru-put (solids) (lbs./hour) | Dimensions (Inches) *W x D x H | Operating Weight Lbs. |
| CLS20 | 30 | 10 | 2700 | 43 x 70 x 110 | 7000 |
| CLS25 | 30 | 12.5 | 3375 | 44 x 70 x 114 | 7000 |
| CLS30 | 40 | 15 | 4050 | 45 x 72 x 119 | 8000 |
| CLS40 | 40 | 20 | 5400 | 47 x 74 x 122 | 9000 |
| CLS60 | 50 | 30 | 8100 | 50 x 76 x 132 | 10500 |
| CLS75 | 60 | 37.5 | 10125 | 52 x 86 x 138 | 12000 |
| CLS100 | 75 | 50 | 13500 | 54 x 96 x 149 | 14000 |
| CLS150 | 100 | 75 | 20250 | 58 x 101 x 158 | 18000 |
| CLS200 | 125 | 100 | 27000 | 63 x 106 x 170 | 23000 |
| CLS250 | 150 | 125 | 33750 | 65 x 114 x 179 | 27000 |
| CLS300 | 150 | 150 | 40500 | 68 x 122 x 185 | 30000 |
| CLS400 | 200 | 200 | 54000 | 72 x 128 x 200 | 40000 |
| CLS500 | 250 | 250 | 67500 | 75 x 134 x 211 | 48000 |

| CL ATTRITORS FOR LIMESTONE GRINDING | | | | | |
|-------------------------------------|-----|--------------------------------|---------------------------------------|--------------------------------|-----------------------|
| Model | HP | Working Media Volume (gallons) | Maximum thru-put (solids) (lbs./hour) | Dimensions (Inches) *W x D x H | Operating Weight Lbs. |
| CL25 | 40 | 12.5 | 2000 | 45 x 80 x 106 | 8000 |
| CL50 | 50 | 25 | 4000 | 50 x 94 x 116 | 10000 |
| CL100 | 75 | 50 | 8000 | 56 x 106 x 132 | 14000 |
| CL200 | 125 | 100 | 16000 | 65 x 116 x 151 | 20000 |
| CL300 | 150 | 150 | 24000 | 70 x 125 x 163 | 28000 |
| CL400 | 200 | 200 | 32000 | 74 x 130 x 177 | 40000 |
| CL500 | 250 | 250 | 40000 | 78 x 134 x 188 | 48000 |
| CL600 | 250 | 300 | 48000 | 81 x 139 x 200 | 55000 |
| CL700 | 300 | 350 | 56000 | 87 x 144 x 211 | 62000 |
| CL800 | 350 | 400 | 64000 | 90 x 149 x 219 | 68000 |
| CL900 | 400 | 450 | 72000 | 92 x 154 x 231 | 73000 |
| CL1000 | 450 | 500 | 80000 | 98 x 159 x 240 | 80000 |
| CL1250 | 500 | 625 | 100000 | 103 x 164 x 254 | 94000 |

* Width dimension does not include room for drive head rotation.

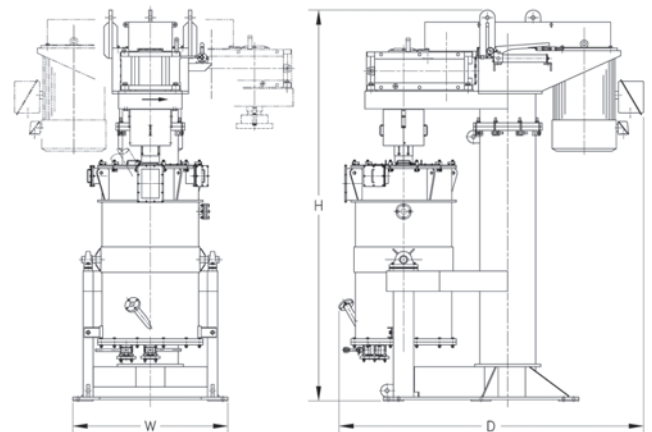

1925 Akron-Peninsula Rd., Akron, OH 44313-4896
 Phone: 330-929-3333 • Fax: 330-929-3034
 unionprocess@unionprocess.com • www.unionprocess.com

Union Process, Inc., reserves the right to make improvements or change machine and equipment designs at any time without notice. Information contained herein is accurate and reliable to the best of our knowledge, but our suggestions and recommendations cannot be guaranteed because the conditions of use are beyond our control.

"Apparatus, Process and/or Product protected under one or more of the following U.S. Patents: 4,979,686; 5,080,293; 5,199,656 and other pending patent applications as well as corresponding and related foreign patent rights."

© Registered trademark of Union Process, Inc.
 © 2012 Union Process, Inc. All rights reserved.

Made and Printed in U.S.A.